

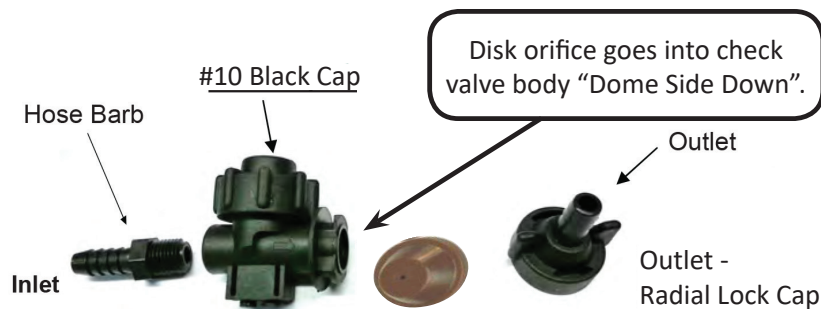
AGXCEL CHECK VALVE GUIDE



10 lb check valve with 3/8" hose barbs

PN # 313

The recommended check valve for most GX5 installations is the 10 lb check with 3/8" hose barbs. This works with 3/8" rubber hose which AgXcel recommends for most applications over 10 GPA on 30" rows. The recommended minimum system operating pressure for this check is 20 psi, to ensure all checks open fully.



4 lb check valve with 1/4" quick connect fittings

PN # 310

4 lb check valves are typically used with GX electric pump systems AgXcel recommends this valve for use with 1/4" tubing applying up to 10 GPA on 30" rows. The recommended minimum system operating pressure for this check is 10 psi, to ensure all checks open fully.



** FOR MORE INFORMATION SEE OUR MANIFOLDS MANUAL ON OUR WEBSITE
VIA THE SUPPORT TAB **



www.agxcel.com

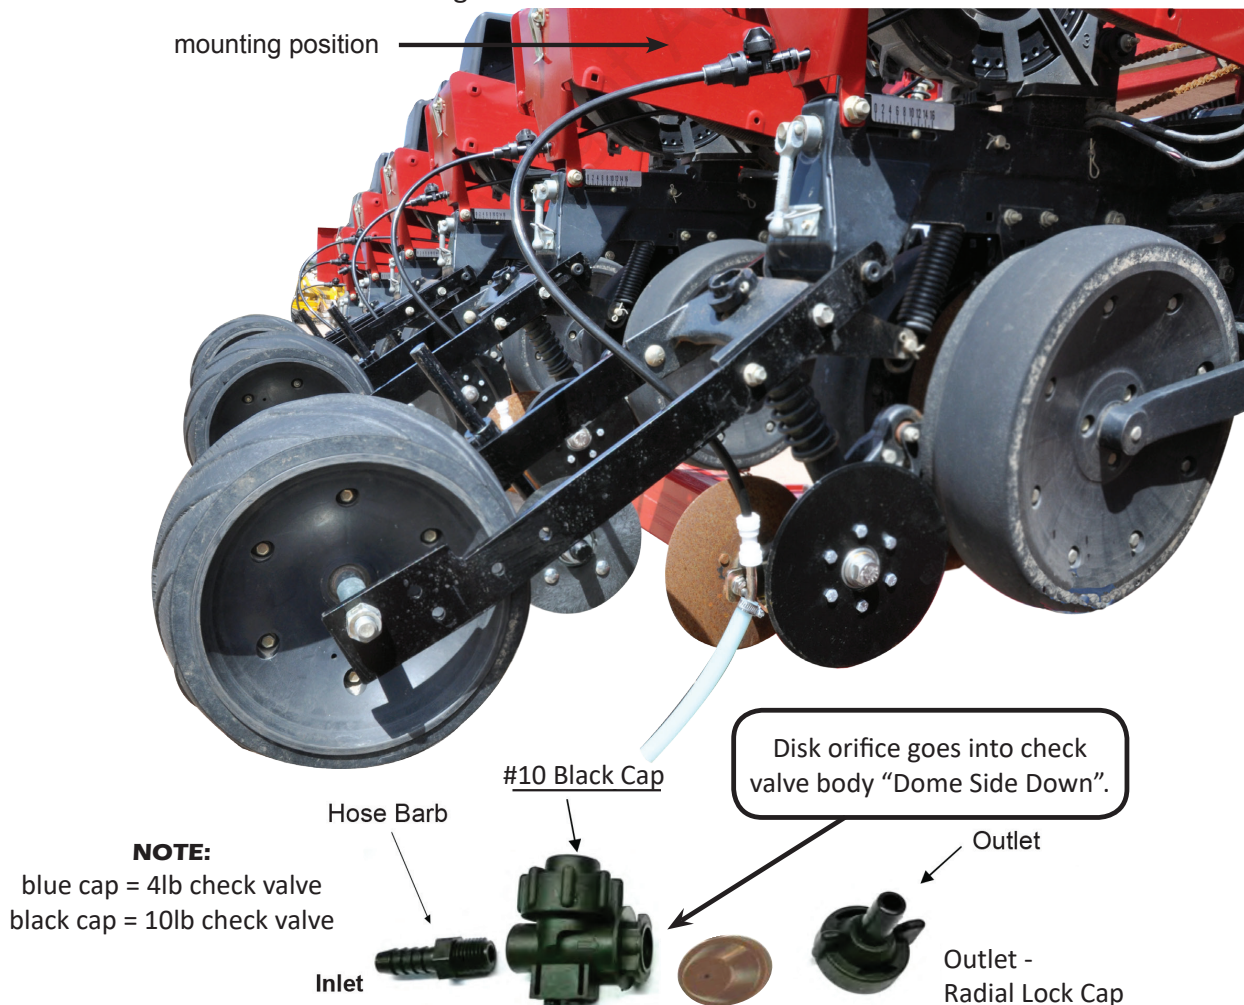
info@agxcel.com

HOW TO MOUNT AGXCEL CHECK VALVE

The preferred placement of the AgXcel check valve is as close to the row unit as possible, without sacrificing the security of the check valve. Approximately 30" from the bottom of the furrow (on every row, equal lengths) where liquid is being placed is ideal.

Follow these steps for successful placement:

- A) Find a secure location, on top of the row unit where debris (like in no-till conditions) will not catch the check valve or tubing and rip it out of place.
- B) Ensure that the install location allows for a tie strap to securely mount the check valve in place.
- C) The check valve works best when approximately 30" from where liquid is being placed.
- D) Ensure that the mounting location allows for ease of access to the orifice, in case the orifice size needs to be changed



CHECK VALVES

KIT#	ASSEMBLED PN#	DESCRIPTION
4#	310	38169 = BODY 38171 = 1/4 PTC CAP 4# CHECK VALVE WITH 1/4" PTC INLET/OUTLET
	305	28549 = BODY 54260 = 3/8 PTC CAP 19884 - 3/8 PTC INLET 4# CHECK VALVE WITH 3/8" PTC INLET/OUTLET
	316	28549 = BODY 32253 = 3/8 BARB INLET 53465 = 3/8 BARB CAP 4# CHECK VALVE WITH 3/8" HOSE BARB INLET/OUTLET
10#	313	26315 = BODY 32253 = 3/8 BARB INLET 53465 = 3/8 BARB CAP 10# CHECK VALVE WITH 3/8" HOSE BARB INLET/OUTLET
	307	26315 = BODY 54260 = 3/8 PTC CAP 19884 = 3/8 PTC INLET 10# CHECK VALVE WITH 3/8" PTC INLET/OUTLET

116 E 6TH ST
KEARNEY NE 68841
877.218.1981

ACTION TIPS

CHECK VALVE COMPONENTS

PN#	DESCRIPTION
26321	CR DIAPH MOD ASY 10 PSI BLK CAP
41716	CR DIAPH MOD ASY 4 PSI BLUE CAP
25720	O'RING DIAPHRAGM - PRESSURE PAD
25712	WILGER 1/4" COLLETE
25718	WILGER 3/8" COLLETE
25803	VITON DIAPHRAGM
25799	BUNA DIAPHRAGM
25951	RADIAL LOCK CAP OUTER O-RING
25953	COMBO-JET SEAL/STRAINER ADAPTER

tip

Be sure orifices are placed inside check valve body facing the correct way (as shown on pg. 2). The dome shape allows for debris to be pushed aside, regulating flow and producing a straight stream. They are precision molded in polyacetal for reliable performance.

ORIFICES

PN#	DESCRIPTION
17975	DC-BLANK
18203	30-DC010 GREY LF
19967	30-DC014 - ROYAL BLUE LF
17591	30-DC018 TERRACOTA
54523	30-DC020 BLACK LF
17964	30 DC 023 PINK
17965	30-DC028 GREY
17966	30-DC015 - BLACK
17967	30-DC-02 BROWN
17968	30-DC-03 ORANGE
53501	30-DC-035 MAROON
17969	30-DC-04 RED
17970	30-DC-05 BLUE
17971	30-DC-06 YELLOW
17972	30-DC-07 EMERALD GREEN
17973	30-DC-08 WHITE
17974	30-DC-10 LIME (IMPERIAL) GREEN
19962	30-DC-12 ROYAL BLUE

DISK ORIFICE CHART

For 30" row spacing

30" Spacing

Orifice Color (Approx Size)	PSI	Gal/Min 28-0-0	MPH						
			4.0	4.5	5.0	5.5	6.0	6.5	7.0
Pink (24)	10	0.033	1.62	1.44	1.30	1.18	1.08	1.00	0.93
	20	0.046	2.28	2.02	1.82	1.66	1.52	1.40	1.30
	30	0.057	2.80	2.49	2.24	2.04	1.87	1.73	1.60
	40	0.065	3.24	2.88	2.59	2.36	2.16	1.99	1.85
	50	0.073	3.64	3.23	2.91	2.64	2.42	2.24	2.08
	60	0.081	3.99	3.54	3.19	2.90	2.66	2.45	2.28
Gray (30)	10	0.050	2.50	2.22	2.00	1.82	1.66	1.54	1.43
	20	0.072	3.55	3.15	2.84	2.58	2.37	2.18	2.03
	30	0.088	4.34	3.85	3.47	3.15	2.89	2.67	2.48
	40	0.101	4.99	4.44	4.00	3.63	3.33	3.07	2.85
	50	0.112	5.56	4.95	4.45	4.05	3.71	3.42	3.18
	60	0.124	6.13	5.45	4.91	4.46	4.09	3.77	3.50
Black (35)	10	0.070	3.46	3.08	2.77	2.52	2.31	2.13	1.98
	20	0.098	4.86	4.32	3.89	3.54	3.24	2.99	2.78
	30	0.120	5.96	5.30	4.77	4.33	3.97	3.67	3.40
	40	0.139	6.88	6.11	5.50	5.00	4.58	4.23	3.93
	50	0.156	7.71	6.85	6.17	5.61	5.14	4.74	4.41
	60	0.170	8.41	7.48	6.73	6.12	5.61	5.18	4.81
Brown (41)	10	0.094	4.64	4.13	3.71	3.38	3.10	2.86	2.65
	20	0.132	6.53	5.80	5.22	4.75	4.35	4.02	3.73
	30	0.162	8.02	7.13	6.41	5.83	5.34	4.93	4.58
	40	0.187	9.24	8.22	7.39	6.72	6.16	5.69	5.28
	50	0.209	10.34	9.19	8.27	7.52	6.89	6.36	5.91
	60	0.228	11.30	10.05	9.04	8.22	7.53	6.95	6.46
Orange (46)	10	0.119	5.91	5.26	4.73	4.30	3.94	3.64	3.38
	20	0.169	8.37	7.44	6.69	6.08	5.58	5.15	4.78
	30	0.207	10.25	9.11	8.20	7.45	6.83	6.31	5.86
	40	0.239	11.83	10.51	9.46	8.60	7.88	7.28	6.76
	50	0.267	13.23	11.76	10.58	9.62	8.82	8.14	7.56
	60	0.293	14.50	12.89	11.60	10.55	9.67	8.92	8.29
Maroon (52)	10	0.149	7.36	6.54	5.89	5.35	4.91	4.53	4.21
	20	0.210	10.38	9.23	8.31	7.55	6.92	6.39	5.93
	30	0.257	12.70	11.29	10.16	9.24	8.47	7.82	7.26
	40	0.296	14.67	13.04	11.74	10.67	9.78	9.03	8.39
	50	0.332	16.43	14.60	13.14	11.95	10.95	10.11	9.39
	60	0.363	17.96	15.96	14.37	13.06	11.97	11.05	10.26
Red (63)	10	0.218	10.78	9.58	8.62	7.84	7.18	6.63	6.16
	20	0.307	15.20	13.51	12.16	11.05	10.13	9.35	8.69
	30	0.376	18.62	16.55	14.89	13.54	12.41	11.46	10.64
	40	0.435	21.51	19.12	17.21	15.64	14.34	13.24	12.29
	50	0.486	24.05	21.38	19.24	17.49	16.03	14.80	13.74
	60	0.532	26.33	23.40	21.06	19.15	17.55	16.20	15.04
Blue (80)	10	0.351	17.39	15.46	13.91	12.65	11.59	10.70	9.94
	20	0.496	24.57	21.84	19.66	17.87	16.38	15.12	14.04
	30	0.608	30.09	26.75	24.08	21.89	20.06	18.52	17.20
	40	0.702	34.74	30.88	27.79	25.26	23.16	21.38	19.85
	50	0.785	38.86	34.54	31.08	28.26	25.90	23.91	22.20
	60	0.859	42.53	37.81	34.03	30.93	28.36	26.18	24.31
Yellow (95)	10	0.506	25.06	22.27	20.05	18.22	16.70	15.42	14.32
	20	0.715	35.39	31.46	28.32	25.74	23.60	21.78	20.23
	30	0.876	43.37	38.55	34.69	31.54	28.91	26.69	24.78
	40	1.009	49.94	44.39	39.95	36.32	33.29	30.73	28.54
	50	1.133	56.07	49.84	44.86	40.78	37.38	34.51	32.04
	60	1.239	61.33	54.51	49.06	44.60	40.88	37.74	35.04
Green (110)	10	0.686	33.95	30.18	27.16	24.69	22.63	20.89	19.40
	20	0.973	48.19	42.83	38.55	35.04	32.12	29.65	27.53
	30	1.186	58.70	52.18	46.96	42.69	39.13	36.12	33.54
	40	1.372	67.90	60.35	54.32	49.38	45.27	41.78	38.80
	50	1.531	75.78	67.36	60.63	55.12	50.52	46.64	43.30
	60	1.681	83.23	73.98	66.58	60.53	55.49	51.22	47.56

AgXcel GX Electric Pump(s) Pressure recommendations (with a 4lb check valve)

- Minimum 10 PSI
- Maximum 30 PSI

AgXcel GX Pressure recommendations (with a 10lb check valve)

- Minimum 20 PSI
- Maximum 80 PSI

Chart is for 28-0-0 Fertilizer @ 70 Degree

- Heavier fertilizers (like 10-34-0) will have 5-15% less flow than chart indicates for a certain pressure
- Cold fertilizers will cause system pressure to increase at a given application rate.
- GX Electric Pump Systems will have reduced flow and increased electrical current draw due to cold fertilizer increasing operating pressure. **Use the largest orifice possible for cold weather operation.**



CALCULATOR

Our easy to use, orifice and metering tube calculator is Available FREE now on the App Store.



DISK ORIFICE CHART

Common Grain Drill row spacings



116 E 6TH ST
KEARNEY NE 68847

877.218.1981

7.5" Spacing

Orifice Color (Approx Size)	PSI	Gal/Min		MPH						
		28-0-0	4.0	4.5	5.0	5.5	6.0	6.5	7.0	
Pink (24)	10	0.033	6.5	5.8	5.2	4.7	4.3	4.0	3.7	
	20	0.046	9.1	8.1	7.3	6.6	6.1	5.6	5.2	
	30	0.057	11.2	10.0	9.0	8.2	7.5	6.9	6.4	
	40	0.065	13.0	11.5	10.4	9.4	8.6	8.0	7.4	
	50	0.073	14.5	12.9	11.6	10.6	9.7	8.9	8.3	
	60	0.081	15.9	14.2	12.8	11.6	10.6	9.8	9.1	
Gray (30)	10	0.050	10.0	8.9	8.0	7.3	6.7	6.1	5.7	
	20	0.072	14.2	12.6	11.4	10.3	9.5	8.7	8.1	
	30	0.088	17.3	15.4	13.9	12.6	11.6	10.7	9.9	
	40	0.101	20.0	17.8	16.0	14.5	13.3	12.3	11.4	
	50	0.112	22.3	19.8	17.8	16.2	14.8	13.7	12.7	
	60	0.124	24.5	21.8	19.6	17.8	16.4	15.1	14.0	
Black (35)	10	0.070	13.8	12.3	11.1	10.1	9.2	8.5	7.9	
	20	0.098	19.4	17.3	15.6	14.1	13.0	12.0	11.1	
	30	0.120	23.8	21.2	19.1	17.3	15.9	14.7	13.6	
	40	0.139	27.5	24.5	22.0	20.0	18.3	16.9	15.7	
	50	0.156	30.8	27.4	24.7	22.4	20.6	19.0	17.6	
	60	0.170	33.6	29.9	26.9	24.5	22.4	20.7	19.2	
Brown (41)	10	0.094	19	17	15	14	12	11	11	
	20	0.132	26	23	21	19	17	16	15	
	30	0.162	32	29	26	23	21	20	18	
	40	0.187	37	33	30	27	25	23	21	
	50	0.209	41	37	33	30	28	25	24	
	60	0.228	45	40	36	33	30	28	26	
Orange (46)	10	0.119	24	21	19	17	16	15	14	
	20	0.169	33	30	27	24	22	21	19	
	30	0.207	41	36	33	30	27	25	23	
	40	0.239	47	42	38	34	32	29	27	
	50	0.267	53	47	42	38	35	33	30	
	60	0.293	58	52	46	42	39	36	33	
Maroon (52)	10	0.149	29	26	24	21	20	18	17	
	20	0.210	42	37	33	30	28	26	24	
	30	0.257	51	45	41	37	34	31	29	
	40	0.296	59	52	47	43	39	36	34	
	50	0.332	66	58	53	48	44	40	38	
	60	0.363	72	64	57	52	48	44	41	
Red (63)	10	0.218	43	38	34	31	29	27	25	
	20	0.307	61	54	49	44	41	37	35	
	30	0.376	74	66	60	54	50	46	43	
	40	0.435	86	76	69	63	57	53	49	
	50	0.486	96	86	77	70	64	59	55	
	60	0.532	105	94	84	77	70	65	60	
Blue (80)	10	0.351	70	62	56	51	46	43	40	
	20	0.496	98	87	79	71	66	60	56	
	30	0.608	120	107	96	88	80	74	69	
	40	0.702	139	124	111	101	93	86	79	
	50	0.785	155	138	124	113	104	96	89	
	60	0.859	170	151	136	124	113	105	97	
Yellow (95)	10	0.506	100	89	80	73	67	62	57	
	20	0.715	142	126	113	103	94	87	81	
	30	0.876	173	154	139	126	116	107	99	
	40	1.009	200	178	160	145	133	123	114	
	50	1.133	224	199	179	163	150	138	128	
	60	1.239	245	218	196	178	164	151	140	

All application rates (gallons/acres) are estimates based on 0-28-0 (10.65 lbs/gallon) at 70 degrees F

10" Spacing

Orifice Color (Approx Size)	PSI	Gal/Min		MPH						
		28-0-0	4.0	4.5	5.0	5.5	6.0	6.5	7.0	
Pink (24)	10	0.033	4.9	4.3	3.9	3.5	3.2	3.0	2.8	
	20	0.046	6.8	6.1	5.5	5.0	4.6	4.2	3.9	
	30	0.057	8.4	7.5	6.7	6.1	5.6	5.2	4.8	
	40	0.065	9.7	8.6	7.8	7.1	6.5	6.0	5.6	
	50	0.073	10.9	9.7	8.7	7.9	7.3	6.7	6.2	
	60	0.081	12.0	10.6	9.6	8.7	8.0	7.4	6.8	
Gray (30)	10	0.050	7.5	6.7	6.0	5.4	5.0	4.6	4.3	
	20	0.072	10.6	9.5	8.5	7.7	7.1	6.6	6.1	
	30	0.088	13.0	11.6	10.4	9.5	8.7	8.0	7.4	
	40	0.101	15.0	13.3	12.0	10.9	10.0	9.2	8.6	
	50	0.112	16.7	14.8	13.4	12.1	11.1	10.3	9.5	
	60	0.124	18.4	16.4	14.7	13.4	12.3	11.3	10.5	
Black (35)	10	0.070	10.4	9.2	8.3	7.6	6.9	6.4	5.9	
	20	0.098	14.6	13.0	11.7	10.6	9.7	9.0	8.3	
	30	0.120	17.9	15.9	14.3	13.0	11.9	11.0	10.2	
	40	0.139	20.6	18.3	16.5	15.0	13.8	12.7	11.8	
	50	0.156	23.1	20.6	18.5	16.8	15.4	14.2	13.2	
	60	0.170	25.2	22.4	20.2	18.4	16.8	15.5	14.4	
Brown (41)	10	0.094	14	12	11	10	9	9	8	
	20	0.132	20	17	16	14	13	12	11	
	30	0.162	24	21	19	17	16	15	14	
	40	0.187	28	25	22	20	18	17	16	
	50	0.209	31	28	25	23	21	19	18	
	60	0.228	34	30	27	25	23	21	19	
Orange (46)	10	0.119	18	16	14	13	12	11	10	
	20	0.169	25	22	20	18	17	15	14	
	30	0.207	31	27	25	22	21	19	18	
	40	0.239	35	32	28	26	24	22	20	
	50	0.267	40	35	32	29	26	24	23	
	60	0.293	43	39	35	32	29	27	25	
Maroon (52)	10	0.149	22	20	18	16	15	14	13	
	20	0.210	31	28	25	23	21	19	18	
	30	0.257	38	34	30	28	25	23	22	
	40	0.296	44	39	35	32	29	27	25	
	50	0.332	49	44	39	36	33	30	28	
	60	0.363	54	48	43	39	36	33	31	
Red (63)	10	0.218	32	29	26	24	22	20	18	
	20	0.307	46	41	36	33	30	28	26	
	30	0.376	56	50	45	41	37	34	32	
	40	0.435	65	57	52	47	43	40	37	
	50	0.486	72	64	58	52	48	44	41	
	60	0.532	79	70	63	57	53	49	45	
Blue (80)	10	0.351	52	46	42	38	35	32	30	
	20	0.496	74	66	59	54	49	45	42	
	30	0.608	90	80	72	66	60	56	52	
	40	0.702	104	93	83	76	69	64	60	
	50	0.785	117	104	93	85	78	72	67	
	60	0.859	128	113	102	93	85	79	73	
Yellow (95)	10	0.506	75	67	60	55	50	46	43	
	20	0.715	106	94	85	77	71	65	61	
	30	0.876	130	116	104	95	87	80	74	
	40	1.009	150	133	120	109	100	92	86	
	50	1.133	168	150	135	122	112	104	96	
	60	1.239	184	164	147	134	123	113	105	

All application rates (gallons/acres) are estimates based on 0-28-0 (10.65 lbs/gallon) at 70 degrees F

DISK ORIFICE CHART

Common Grain Drill row spacings



CALCULATOR

Our easy to use, orifice and metering tube calculator is Available FREE now on the App Store.

15" Spacing

15" Spacing

15" Spacing

Orifice Color (Approx Size)	PSI	Gal/Min 28-0-0	MPH						
			4.0	4.5	5.0	5.5	6.0	6.5	7.0
Pink (24)	10	0.033	3.2	2.9	2.6	2.4	2.2	2.0	1.9
	20	0.046	4.6	4.0	3.6	3.3	3.0	2.8	2.6
	30	0.057	5.6	5.0	4.5	4.1	3.7	3.5	3.2
	40	0.065	6.5	5.8	5.2	4.7	4.3	4.0	3.7
	50	0.073	7.3	6.5	5.8	5.3	4.8	4.5	4.2
Gray (30)	60	0.081	8.0	7.1	6.4	5.8	5.3	4.9	4.6
	10	0.050	5.0	4.4	4.0	3.6	3.3	3.1	2.9
	20	0.072	7.1	6.3	5.7	5.2	4.7	4.4	4.1
	30	0.088	8.7	7.7	6.9	6.3	5.8	5.3	5.0
	40	0.101	10.0	8.9	8.0	7.3	6.7	6.1	5.7
Black (35)	50	0.112	11.1	9.9	8.9	8.1	7.4	6.8	6.4
	60	0.124	12.3	10.9	9.8	8.9	8.2	7.5	7.0
	10	0.070	6.9	6.2	5.5	5.0	4.6	4.3	4.0
	20	0.098	9.7	8.6	7.8	7.1	6.5	6.0	5.6
	30	0.120	11.9	10.6	9.5	8.7	7.9	7.3	6.8
Brown (41)	40	0.139	13.8	12.2	11.0	10.0	9.2	8.5	7.9
	50	0.156	15.4	13.7	12.3	11.2	10.3	9.5	8.8
	60	0.170	16.8	15.0	13.5	12.2	11.2	10.4	9.6
	10	0.094	9.3	8.3	7.4	6.8	6.2	5.7	5.3
	20	0.132	13.1	11.6	10.4	9.5	8.7	8.0	7.5
Orange (46)	30	0.162	16.0	14.3	12.8	11.7	10.7	9.9	9.2
	40	0.187	18.5	16.4	14.8	13.4	12.3	11.4	10.6
	50	0.209	20.7	18.4	16.5	15.0	13.8	12.7	11.8
	60	0.228	22.6	20.1	18.1	16.4	15.1	13.9	12.9
	10	0.119	11.8	10.5	9.5	8.6	7.9	7.3	6.8
Maroon (52)	20	0.169	16.7	14.9	13.4	12.2	11.2	10.3	9.6
	30	0.207	20.5	18.2	16.4	14.9	13.7	12.6	11.7
	40	0.239	23.7	21.0	18.9	17.2	15.8	14.6	13.5
	50	0.267	26.5	23.5	21.2	19.2	17.6	16.3	15.1
	60	0.293	29.0	25.8	23.2	21.1	19.3	17.8	16.6
Red (63)	10	0.149	15	13	12	11	10	9	8
	20	0.210	21	18	17	15	14	13	12
	30	0.257	25	23	20	18	17	16	15
	40	0.296	29	26	23	21	20	18	17
	50	0.332	33	29	26	24	22	20	19
Blue (80)	60	0.363	36	32	29	26	24	22	21
	10	0.218	22	19	17	16	14	13	12
	20	0.307	30	27	24	22	20	19	17
	30	0.376	37	33	30	27	25	23	21
	40	0.435	43	38	34	31	29	26	25
Yellow (95)	50	0.486	48	43	38	35	32	30	27
	60	0.532	53	47	42	38	35	32	30
	10	0.351	35	31	28	25	23	21	20
	20	0.496	49	44	39	36	33	30	28
	30	0.608	60	54	48	44	40	37	34
Green (110)	40	0.702	69	62	56	51	46	43	40
	50	0.785	78	69	62	57	52	48	44
	60	0.859	85	76	68	62	57	52	49
	10	0.506	50	45	40	36	33	31	29
	20	0.715	71	63	57	51	47	44	40
White (125)	30	0.876	87	77	69	63	58	53	50
	40	1.009	100	89	80	73	67	61	57
	50	1.133	112	100	90	82	75	69	64
	60	1.239	123	109	98	89	82	75	70
	10	0.686	68	60	54	49	45	42	39
Lime Green (156)	20	0.973	96	86	77	70	64	59	55
	30	1.186	117	104	94	85	78	72	67
	40	1.372	136	121	109	99	91	84	78
	50	1.531	152	135	121	110	101	93	87
	60	1.681	166	148	133	121	111	102	95
	10	0.867	86	76	69	62	57	53	49
	20	1.230	122	108	97	89	81	75	70
	30	1.504	149	132	119	108	99	92	85
	40	1.735	172	153	137	125	114	106	98
	50	1.938	192	171	153	140	128	118	110
	60	2.124	210	187	168	153	140	129	120
	10	1.372	136	121	109	99	91	84	78
	20	1.947	193	171	154	140	128	119	110
	30	2.381	236	209	189	171	157	145	135
	40	2.752	272	242	218	198	182	168	156
	50	3.071	304	270	243	221	203	187	174
	60	3.363	333	296	266	242	222	205	190

All application rates (gallons/acres) are estimates based on 0-28-0 (10.65 lbs/gallon) at 70 degrees F.

20" Spacing

20" Spacing

20" Spacing

Orifice Color (Approx Size)									
	PSI	Gal/Min 28-0-0	4.0	4.5	5.0	MPH			7.0
Pink (24)	10	0.033	2.4	2.2	1.9	1.8	1.6	1.5	1.4
	20	0.046	3.4	3.0	2.7	2.5	2.3	2.1	2.0
	30	0.057	4.2	3.7	3.4	3.1	2.8	2.6	2.4
	40	0.065	4.9	4.3	3.9	3.5	3.2	3.0	2.8
	50	0.073	5.5	4.8	4.4	4.0	3.6	3.4	3.1
60	0.081	6.0	5.3	4.8	4.3	4.0	3.7	3.4	
Gray (30)	10	0.050	3.7	3.3	3.0	2.7	2.5	2.3	2.1
	20	0.072	5.3	4.7	4.3	3.9	3.5	3.3	3.0
	30	0.088	6.5	5.8	5.2	4.7	4.3	4.0	3.7
	40	0.101	7.5	6.7	6.0	5.4	5.0	4.6	4.3
	50	0.112	8.3	7.4	6.7	6.1	5.6	5.1	4.8
60	0.124	9.2	8.2	7.4	6.7	6.1	5.7	5.3	
Black (35)	10	0.070	5.2	4.6	4.2	3.8	3.5	3.2	3.0
	20	0.098	7.3	6.5	5.8	5.3	4.9	4.5	4.2
	30	0.120	8.9	7.9	7.1	6.5	6.0	5.5	5.1
	40	0.139	10.3	9.2	8.3	7.5	6.9	6.3	5.9
	50	0.156	11.6	10.3	9.3	8.4	7.7	7.1	6.6
60	0.170	12.6	11.2	10.1	9.2	8.4	7.8	7.2	
Brown (41)	10	0.094	7.0	6.2	5.6	5.1	4.6	4.3	4.0
	20	0.132	9.8	8.7	7.8	7.1	6.5	6.0	5.6
	30	0.162	12.0	10.7	9.6	8.7	8.0	7.4	6.9
	40	0.187	13.9	12.3	11.1	10.1	9.2	8.5	7.9
	50	0.209	15.5	13.8	12.4	11.3	10.3	9.5	8.9
60	0.228	17.0	15.1	13.6	12.3	11.3	10.4	9.7	
Orange (46)	10	0.119	8.9	7.9	7.1	6.5	5.9	5.5	5.1
	20	0.169	12.6	11.2	10.0	9.1	8.4	7.7	7.2
	30	0.207	15.4	13.7	12.3	11.2	10.3	9.5	8.8
	40	0.239	17.7	15.8	14.2	12.9	11.8	10.9	10.1
	50	0.267	19.8	17.6	15.9	14.4	13.2	12.2	11.3
60	0.293	21.7	19.3	17.4	15.8	14.5	13.4	12.4	
Maroon (52)	10	0.149	11	10	9	8	7	7	6
	20	0.210	16	14	12	11	10	10	9
	30	0.257	19	17	15	14	13	12	11
	40	0.296	22	20	18	16	15	14	13
	50	0.332	25	22	20	18	16	15	14
60	0.363	27	24	22	20	18	17	15	
Red (63)	10	0.218	16	14	13	12	11	10	9
	20	0.307	23	20	18	17	15	14	13
	30	0.376	28	25	22	20	19	17	16
	40	0.435	32	29	26	23	22	20	18
	50	0.486	36	32	29	26	24	22	21
60	0.532	39	35	32	29	26	24	23	
Blue (80)	10	0.351	26	23	21	19	17	16	15
	20	0.496	37	33	29	27	25	23	21
	30	0.608	45	40	36	33	30	28	26
	40	0.702	52	46	42	38	35	32	30
	50	0.785	58	52	47	42	39	36	33
60	0.859	64	57	51	46	43	39	36	
Yellow (95)	10	0.506	38	33	30	27	25	23	21
	20	0.715	53	47	42	39	35	33	30
	30	0.876	65	58	52	47	43	40	37
	40	1.009	75	67	60	54	50	46	43
	50	1.133	84	75	67	61	56	52	48
60	1.239	92	82	74	67	61	57	53	
Green (110)	10	0.686	51	45	41	37	34	31	29
	20	0.973	72	64	58	53	48	44	41
	30	1.186	88	78	70	64	59	54	50
	40	1.372	102	91	81	74	68	63	58
	50	1.531	114	101	91	83	76	70	65
60	1.681	125	111	100	91	83	77	71	
White (125)	10	0.867	64	57	52	47	43	40	37
	20	1.230	91	81	73	66	61	56	52
	30	1.504	112	99	89	81	74	69	64
	40	1.735	129	114	103	94	86	79	74
	50	1.938	144	128	115	105	96	89	82
60	2.124	158	140	126	115	105	97	90	
Lime Green (156)	10	1.372	102	91	81	74	68	63	58
	20	1.947	145	128	116	105	96	89	83
	30	2.381	177	157	141	129	118	109	101
	40	2.752	204	182	163	149	136	126	117
	50	3.071	228	203	182	166	152	140	130
60	3.363	250	222	200	182	166	154	143	

DISK ORIFICE CHART



**116 E 6TH ST
KEARNEY NE 68847**

877.218.1981

22" Spacing

22" Spacing

22" Spacing









Orifice Color (Approx Size)	PSI	Gal/Min 28-0-0	MPH						
			4.0	4.5	5.0	5.5	6.0	6.5	7.0
Pink (24)	10	0.033	2.2	2.0	1.8	1.6	1.5	1.4	1.3
	20	0.046	3.1	2.8	2.5	2.3	2.1	1.9	1.8
	30	0.057	3.8	3.4	3.1	2.8	2.5	2.4	2.2
	40	0.065	4.4	3.9	3.5	3.2	2.9	2.7	2.5
	50	0.073	5.0	4.4	4.0	3.6	3.3	3.1	2.8
	60	0.081	5.4	4.8	4.3	4.0	3.6	3.3	3.1
Gray (30)	10	0.050	3.4	3.0	2.7	2.5	2.3	2.1	1.9
	20	0.072	4.8	4.3	3.9	3.5	3.2	3.0	2.8
	30	0.088	5.9	5.3	4.7	4.3	3.9	3.6	3.4
	40	0.101	6.8	6.1	5.4	5.0	4.5	4.2	3.9
	50	0.112	7.6	6.7	6.1	5.5	5.1	4.7	4.3
	60	0.124	8.4	7.4	6.7	6.1	5.6	5.1	4.8
Black (35)	10	0.070	4.7	4.2	3.8	3.4	3.1	2.9	2.7
	20	0.098	6.6	5.9	5.3	4.8	4.4	4.1	3.8
	30	0.120	8.1	7.2	6.5	5.9	5.4	5.0	4.6
	40	0.139	9.4	8.3	7.5	6.8	6.3	5.8	5.4
	50	0.156	10.5	9.3	8.4	7.6	7.0	6.5	6.0
	60	0.170	11.5	10.2	9.2	8.3	7.6	7.1	6.6
Brown (41)	10	0.094	6.3	5.6	5.1	4.6	4.2	3.9	3.6
	20	0.132	8.9	7.9	7.1	6.5	5.9	5.5	5.1
	30	0.162	10.9	9.7	8.7	8.0	7.3	6.7	6.2
	40	0.187	12.6	11.2	10.1	9.2	8.4	7.8	7.2
	50	0.209	14.1	12.5	11.3	10.3	9.4	8.7	8.1
	60	0.228	15.4	13.7	12.3	11.2	10.3	9.5	8.8
Orange (46)	10	0.119	8.1	7.2	6.5	5.9	5.4	5.0	4.6
	20	0.169	11.4	10.1	9.1	8.3	7.6	7.0	6.5
	30	0.207	14.0	12.4	11.2	10.2	9.3	8.6	8.0
	40	0.239	16.1	14.3	12.9	11.7	10.8	9.9	9.2
	50	0.267	18.0	16.0	14.4	13.1	12.0	11.1	10.3
	60	0.293	19.8	17.6	15.8	14.4	13.2	12.2	11.3
Maroon (52)	10	0.149	10	9	8	7	7	6	6
	20	0.210	14	13	11	10	9	9	8
	30	0.257	17	15	14	13	12	11	10
	40	0.296	20	18	16	15	13	12	11
	50	0.332	22	20	18	16	15	14	13
	60	0.363	24	22	20	18	16	15	14
Red (63)	10	0.218	15	13	12	11	10	9	8
	20	0.307	21	18	17	15	14	13	12
	30	0.376	25	23	20	18	17	16	15
	40	0.435	29	26	23	21	20	18	17
	50	0.486	33	29	26	24	22	20	19
	60	0.532	36	32	29	26	24	22	21
Blue (80)	10	0.351	24	21	19	17	16	15	14
	20	0.496	34	30	27	24	22	21	19
	30	0.608	41	36	33	30	27	25	23
	40	0.702	47	42	38	34	32	29	27
	50	0.785	53	47	42	39	35	33	30
	60	0.859	58	52	46	42	39	36	33
Yellow (95)	10	0.506	34	30	27	25	23	21	20
	20	0.715	48	43	39	35	32	30	28
	30	0.876	59	53	47	43	39	36	34
	40	1.009	68	61	54	50	45	42	39
	50	1.133	76	68	61	56	51	47	44
	60	1.239	84	74	67	61	56	51	48
Green (110)	10	0.686	46	41	37	34	31	28	26
	20	0.973	66	58	53	48	44	40	38
	30	1.186	80	71	64	58	53	49	46
	40	1.372	93	82	74	67	62	57	53
	50	1.531	103	92	83	75	69	64	59
	60	1.681	113	101	91	83	76	70	65
White (125)	10	0.867	59	52	47	43	39	36	33
	20	1.230	83	74	66	60	55	51	47
	30	1.504	102	90	81	74	68	62	58
	40	1.735	117	104	94	85	78	72	67
	50	1.938	131	116	105	95	87	81	75
	60	2.124	143	127	115	104	96	88	82
Lime Green (156)	10	1.372	93	82	74	67	62	57	53
	20	1.947	131	117	105	96	88	81	75
	30	2.381	161	143	129	117	107	99	92
	40	2.752	186	165	149	135	124	114	106
	50	3.071	207	184	166	151	138	128	118
	60	3.363	227	202	182	165	151	140	130

All application rates (gallons/acres) are estimates based on 0-28-0 (10.65 lbs/gallon) at 70 degrees F.

36" Spacing

36" Spacing

36" Spacing

Orifice Color (Approx Size)	PSI	Gal/Min	MPH						
		28-0-0	4.0	4.5	5.0	5.5	6.0	6.5	7.0
 Pink (24)	10	0.033	1.4	1.2	1.1	1.0	0.9	0.8	0.8
	20	0.046	1.9	1.7	1.5	1.4	1.3	1.2	1.1
	30	0.057	2.3	2.1	1.9	1.7	1.6	1.4	1.3
	40	0.065	2.7	2.4	2.2	2.0	1.8	1.7	1.5
	50	0.073	3.0	2.7	2.4	2.2	2.0	1.9	1.7
	60	0.081	3.3	3.0	2.7	2.4	2.2	2.0	1.9
 Gray (30)	10	0.050	2.1	1.8	1.7	1.5	1.4	1.3	1.2
	20	0.072	3.0	2.6	2.4	2.2	2.0	1.8	1.7
	30	0.088	3.6	3.2	2.9	2.6	2.4	2.2	2.1
	40	0.101	4.2	3.7	3.3	3.0	2.8	2.6	2.4
	50	0.112	4.6	4.1	3.7	3.4	3.1	2.9	2.6
	60	0.124	5.1	4.5	4.1	3.7	3.4	3.1	2.9
 Black (35)	10	0.070	2.9	2.6	2.3	2.1	1.9	1.8	1.6
	20	0.098	4.1	3.6	3.2	2.9	2.7	2.5	2.3
	30	0.120	5.0	4.4	4.0	3.6	3.3	3.1	2.8
	40	0.139	5.7	5.1	4.6	4.2	3.8	3.5	3.3
	50	0.156	6.4	5.7	5.1	4.7	4.3	4.0	3.7
	60	0.170	7.0	6.2	5.6	5.1	4.7	4.3	4.0
 Brown (41)	10	0.094	3.9	3.4	3.1	2.8	2.6	2.4	2.2
	20	0.132	5.4	4.8	4.4	4.0	3.6	3.3	3.1
	30	0.162	6.7	5.9	5.3	4.9	4.5	4.1	3.8
	40	0.187	7.7	6.8	6.2	5.6	5.1	4.7	4.4
	50	0.209	8.6	7.7	6.9	6.3	5.7	5.3	4.9
	60	0.228	9.4	8.4	7.5	6.8	6.3	5.8	5.4
 Orange (46)	10	0.119	4.9	4.4	3.9	3.6	3.3	3.0	2.8
	20	0.169	7.0	6.2	5.6	5.1	4.6	4.3	4.0
	30	0.207	8.5	7.6	6.8	6.2	5.7	5.3	4.9
	40	0.239	9.9	8.8	7.9	7.2	6.6	6.1	5.6
	50	0.267	11.0	9.8	8.8	8.0	7.3	6.8	6.3
	60	0.293	12.1	10.7	9.7	8.8	8.1	7.4	6.9
 Maroon (52)	10	0.149	6	5	5	4	4	4	4
	20	0.210	9	8	7	6	6	5	5
	30	0.257	11	9	8	8	7	7	6
	40	0.296	12	11	10	9	8	8	7
	50	0.332	14	12	11	10	9	8	8
	60	0.363	15	13	12	11	10	9	9
 Red (63)	10	0.218	9	8	7	7	6	6	5
	20	0.307	13	11	10	9	8	8	7
	30	0.376	16	14	12	11	10	10	9
	40	0.435	18	16	14	13	12	11	10
	50	0.486	20	18	16	15	13	12	11
	60	0.532	22	20	18	16	15	14	13
 Blue (80)	10	0.351	14	13	12	11	10	9	8
	20	0.496	20	18	16	15	14	13	12
	30	0.608	25	22	20	18	17	15	14
	40	0.702	29	26	23	21	19	18	17
	50	0.785	32	29	26	24	22	20	19
	60	0.859	35	32	28	26	24	22	20
 Yellow (95)	10	0.506	21	19	17	15	14	13	12
	20	0.715	29	26	24	21	20	18	17
	30	0.876	36	32	29	26	24	22	21
	40	1.009	42	37	33	30	28	26	24
	50	1.133	47	42	37	34	31	29	27
	60	1.239	51	45	41	37	34	31	29
 Green (110)	10	0.686	28	25	23	21	19	17	16
	20	0.973	40	36	32	29	27	25	23
	30	1.186	49	43	39	36	33	30	28
	40	1.372	57	50	45	41	38	35	32
	50	1.531	63	56	51	46	42	39	36
	60	1.681	69	62	55	50	46	43	40
 White (125)	10	0.867	36	32	29	26	24	22	20
	20	1.230	51	45	41	37	34	31	29
	30	1.504	62	55	50	45	41	38	35
	40	1.735	72	64	57	52	48	44	41
	50	1.938	80	71	64	58	53	49	46
	60	2.124	88	78	70	64	58	54	50
 Lime Green (156)	10	1.372	57	50	45	41	38	35	32
	20	1.947	80	71	64	58	54	49	46
	30	2.381	98	87	79	71	65	60	56
	40	2.752	114	101	91	83	76	70	65
	50	3.071	127	113	101	92	84	78	72
	60	3.363	139	123	111	101	92	85	79

Precision Liquid Fertilizer Solutions



FOR ALL YOUR LIQUID FERTILIZER NEEDS

116 E. 6th St., Kearney, NE 68847
877.218.1981