



Quick Start Setup Instructions for Trimble's FM 750, FM1000, FMX Rate Controller

PLEASE NOTE: *Your setup may vary.* Not all screens are shown. See Trimble's Operator's Manual for safety information and additional setup/operating information. **Please ensure you have the latest firmware installed!**

MENU STRUCTURE FOR LIQUID RATE CONTROLLER



Home

- Support
- System Information
- Camera




Configuration

- Setup
- Calibrate
- Diagnostics



Config Selection

- Display
- Vehicle
- Implement

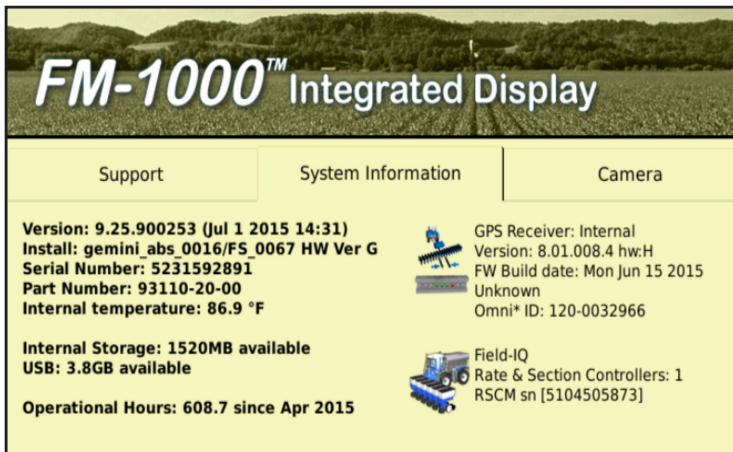

System Information

From the home screen, you can select 3 tabs; Support, System Information and Camera. The System Information tab is shown above. This will show what Trimble components are properly connected to your display. If your fertilizer system quits functioning, first check that the Control Module is still recognized on the display. If not, inspect the Trimble wiring harness connections or consult your Trimble dealer.


CFX-750 and FM750 Users

Information in this manual is applicable to the 750 except for screen shots shown in the Setup & Operation. The calibration and setup values in this section DO apply to the 750. However, the 750 has a completely different screen layout and menu structure that is not shown in this manual. Use your Trimble manual to navigate, then enter the appropriate numbers from the AgXcel manual.

Configuration – Setup & Calibrate

In the Setup & Calibrate menus, you will set the Trimble Field-IQ to work properly with the AgXcel Fertilizer System. Carefully follow these steps to first make sure you have the proper settings. Then, run the tests shown to verify your fertilizer system is ready to go to the field.

- From the home screen, choose **Setup & Diagnostics**.
- The Configuration screen below will appear. Choose **Field-IQ**. The Setup & Calibrate buttons will be locked, shown by a padlock next to them.
- Push **Setup**, then enter "2009"
- After entering the code, the locks will disappear. Push **Setup** to proceed to the next steps.

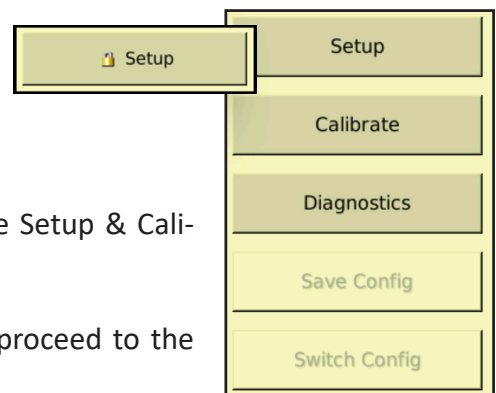



Quick Start Setup Instructions for Trimble's FM 750, FM1000, FMX Rate Controller

Configuration – Setup cont.

- Select **Field-IQ** and press the **Setup** button.
- The next page will display 3 selections, press the “**Material Setup**” button.
- Select one of the available material profiles or press **Add** to add a new material. Press **Edit** to change any of the parameters of the material selected.
- **Material Type** will need to be set to **Liquid**.
- Give the material a name that makes sense.
- Set **Target Rate 1 & Target Rate 2** as desired.
- Rate Increment increases or decreases your **Target Rates** by this amount each time you press the rate **Adjustment Switch** on the **Master Switch Box**.
- **Manual Rate Increments** work when the **Rate Switch** is in the **Manual Position**. This number controls the speed at which the valve increases or decreases when you press the **Rate Adjustment Switch** on the **Master Switch Box**.
- **Minimum Rate** is typically set at **0**.
- **Maximum Rate** is set at something higher than the maximum rate that will be applied.

These parameters may be adjusted as desired.

- **Jump Start Speed** is the speed the system will ramp up to when the operator pushes the **Jump Start** button on the **Master Switch Box**. **3.0 – 5.0 mph** is a good setting for this.
- **Jump Start Timeout** allows the **Jump Start Speed** to run for a specific amount of time.
- **Apply Latency to Boundary**: set as needed so the system begins applying when needed.

AgXcel recommends setting the **Rate Snapping** to **On**. This will smooth out the rate fluctuation seen on the screen. If you are within the rate smoothing range, the applied rate will just show your target rate and not small deviations from target rate.

The Configuration screen displays a list of system components on the left: System [System], Manual Guidance [display stand], GPS Receiver, Implement [New Implement], and Field-IQ. On the right, there are buttons for Setup, Calibrate, Diagnostics, Save Config, and Switch Config. The Field-IQ component is currently selected and highlighted in blue.

The Material Setup screen is divided into two main sections. The top section, titled 'Material Setup', contains buttons for Material Setup, Control Setup, and Material Assignment. The bottom section, titled 'Available Materials', lists various material types: Nitrogen, Row Crop Seed, Liquid (selected), Granular Seed, Granular Fertilizer, and Anhydrous. Below this list are buttons for Add, Edit, Delete, and Cancel. To the right of the material list, there are input fields for Target Rate 2 (10.00 gal/a), Jump Start Speed (5.00 mph), Shutoff Speed (0.36 mph), Minimum Override Speed (0.00 mph), and Calibration Constant (3.79 pul/gal). An OK button is located at the bottom right.

The Material Details: Liquid screen shows the configuration for a liquid material. It has tabs for Material, Alarms, Operation, and Advanced. The Material tab is active, showing the Material Type set to Liquid and the Material Name set to Liquid. To the right, there are input fields for Target Rate 1 (10.00 gal/a), Target Rate 2 (15.00 gal/a), Rate Increment (1.00 gal/a), Manual Rate Increment (100 %), Minimum Rate (0.00 gal/a), and Maximum Rate (30.00 gal/a). Cancel and OK buttons are at the bottom.

This screen shows the 'Advanced' tab of the Material Details: Liquid configuration. It contains input fields for Jump Start Speed (5.00 mph), Jump Start Timeout (0.00 s), Shutoff Speed (0.36 mph), and Minimum Override Speed (0.00 mph). Below these are dropdown menus for 'Apply Latency to Boundary' (set to No) and 'Rate Snapping' (set to On). Cancel and OK buttons are at the bottom.



Quick Start Setup Instructions for Trimble's FM 750, FM1000, FMX Rate Controller

Setup - Control

If this is your first time setting up the **Trimble Control**, there will be **no Locations** entered. In that case, press **Add** and enter the information for a location. If there is a location and material that has been created already, you can select and/or edit.

Material

- Select your desired material from the **Available Materials**

Layout

- From the Layout screen, you can enter a **Location Name** such as **Front Tank**, **Rear Tank**, etc. If desired, you can set up the **Bin/Tank Setup** to allow the system to track how much material is left in the tank.
- **(OPTIONAL)** If you would like to let your controller monitor how much material is left and set alarms when the material is getting low, set your values in the **Bin/Tank Setup**.



Quick Start Setup Instructions for Trimble's FM 750, FM1000, FMX Rate Controller

Section Control

- If you have section control set up on your liquid fertilizer system, enable it by having the Section Control set to **On**
- Press **Setup** next to **Section Control Module Location**

- On the **Section Control Module Setup** Screen, set the **Number of Modules** in your system.
- Select the **Module's Serial Number**.
- Set the number of **Sections** for your system.
- Press **Section Widths**.
- Set the **widths** of your sections

- Press the **Setup** button next to Section Control to take you to the Section Control Setup screen
- Set Section Control Type to: **"Boom Valve"**
- Set **Off When Stopped** to: **"Yes"**
- Press **"Latency"** button to setup latency.
- **On Latency: 0.50 s**
- **Off Latency: 0.00 s**

***Adjust these latency settings as necessary in the field.**



Quick Start Setup Instructions for Trimble's FM 750, FM1000, FMX Rate Controller

Rate Control

- Select the **Rate Control** tab at the top of the screen.
- Set **Rate Control** to **ON**
- Set **Number of Nozzles** (number of rows)
- Set **No/Low Flow Timeout** to 45 s for troubleshooting so the system does not shut off too quickly.
- Press **Setup** next to **Rate Control Module Location**.
- Set the correct information on the **Rate Control Module Setup** screen.
- Press **OK**

- Trimble will take you back to the screen you see above. On **Drive Setup**, press **Setup**.
- **Rate Control** (Continued)
- Set up the **Valve Setup** as shown:
- Valve Type: **PWM**
- Valve Behavior When Sections Closed: **Close**
- Auxiliary Valve: **Disabled**

(**OPTIONAL:** If using an **Aux/Dump valve** to keep the pump running when application stops so the system will resume applying at the **Target Rate** immediately upon restart, set **Auxiliary Valve to Dump**, then set **Valve Behavior** when **Sections Closed** to either **Lock in Last Position** or **Lock at Minimum**. This setup requires section valves with an additional dump valve plumbed to return flow to the tank when application stops.)

Press **Feedback Setup** button on the **Drive Setup** page.

Set the Feedback Setup as shown:

- **Flow Meter Type:** Other
- **Flowmeter Calibration:** See AgXcel Flow Meter Guide
- **Minimum Flow:** 0.0 GPM (Can be set to the minimum specification for the flow meter.)



Quick Start Setup Instructions for Trimble's FM 750, FM1000, FMX Rate Controller

Flow Meter Guide

FLOW RANGE (GPM)	PULSES PER GALLON	TRIMBLE	
DIVIDE BY 8 CABLE REQUIRED (DB8)		DB8 CABLE	CAL #
0.08 - 1.6	22710	NO	22710
0.13 - 2.6	22710	NO	22710
0.3 - 5	11355	NO	11355
0.6 - 13	4542	NO	4542
1.3 - 26	2271	NO	2271
2.6 - 53	1135	NO	1135

Turbine Flowmeters

FM750 Reg
Micro-Trak Cal Number - 145 (SprayMate, Auto-X)
Pulses Per Gallon - 72.50 (JD, AGL, Trimble)
Pulses Per 10 Gallon - 725 (Raven)

FM750 LF
Micro-Trak Cal Number - 466 (Spraymate, Auto-X)
Pulses Per Gallon - 233 (JD, AGL, Trimble)
Pulses Per 10 Gallon - 2330 (Raven)

Pressure Sensor Setup

Select the Sensor tab

Set up the Sensor setup as shown

Sensor Type: Liquid Pressure

Name: Transducer (or other name)

Alarm: Enabled

Suggested Alarms:

Warn if Below:

GX5 (hydraulic).....0

GX2 (electric).....0

Synergist.....0

Warn if Above:

GX5 (hydraulic).....80

GX2 (electric).....25

Synergist.....35

Sensor Setup will take you to a screen where you can select the Field-IQ Module that is controlling this sensor.

REMINDER: The pressure sensor is for informational purposes only and does not control the system in any way.

To finish the Pressure Sensor setup, it will be necessary to go to **Field-IQ Calibration** and select **Pressure Calibration** and the name of the pressure sensor you set up.

Set the following as shown

Calibrate Type: Point/Slope

Slope: 50 mv/PSI

Add Sensor

Sensor Type

Name

Alarm

Warn if below

Warn if above

Warn after

Field-IQ Calibration

[-] Rate and Section Control Module 5104505873

[-] Drive Calibration

[-] Flow Calibration

[-] Pressure Calibration


[-] New Sensor - Module 5104505873



Quick Start Setup Instructions for Trimble's FM 750, FM1000, FMX Rate Controller

Implement Lift Switch Calibration


- From the **Field-IQ Calibration** screen, select the **Implement Lift** option
- Raise the implement and then tap **Next**
- Lower the implement and then tap **Next**
- Tap OK to return to the **Field-IQ Calibration** screen

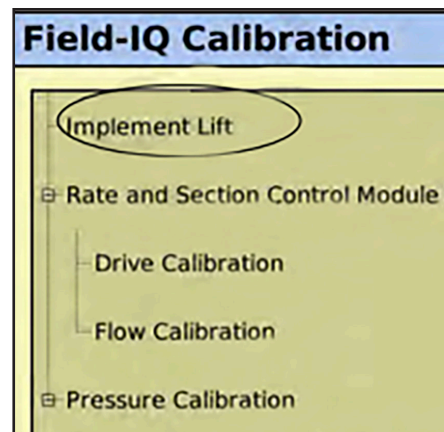

Implement Setup

Implement Setup is where you set the information for the implement you are using. Mainly these settings affect the guidance control. However, if using auto section shutoff, these settings will determine when each section valve shuts off.

Measure your implement carefully and consult with your Trimble dealer for additional assistance with the Implement Setup section.

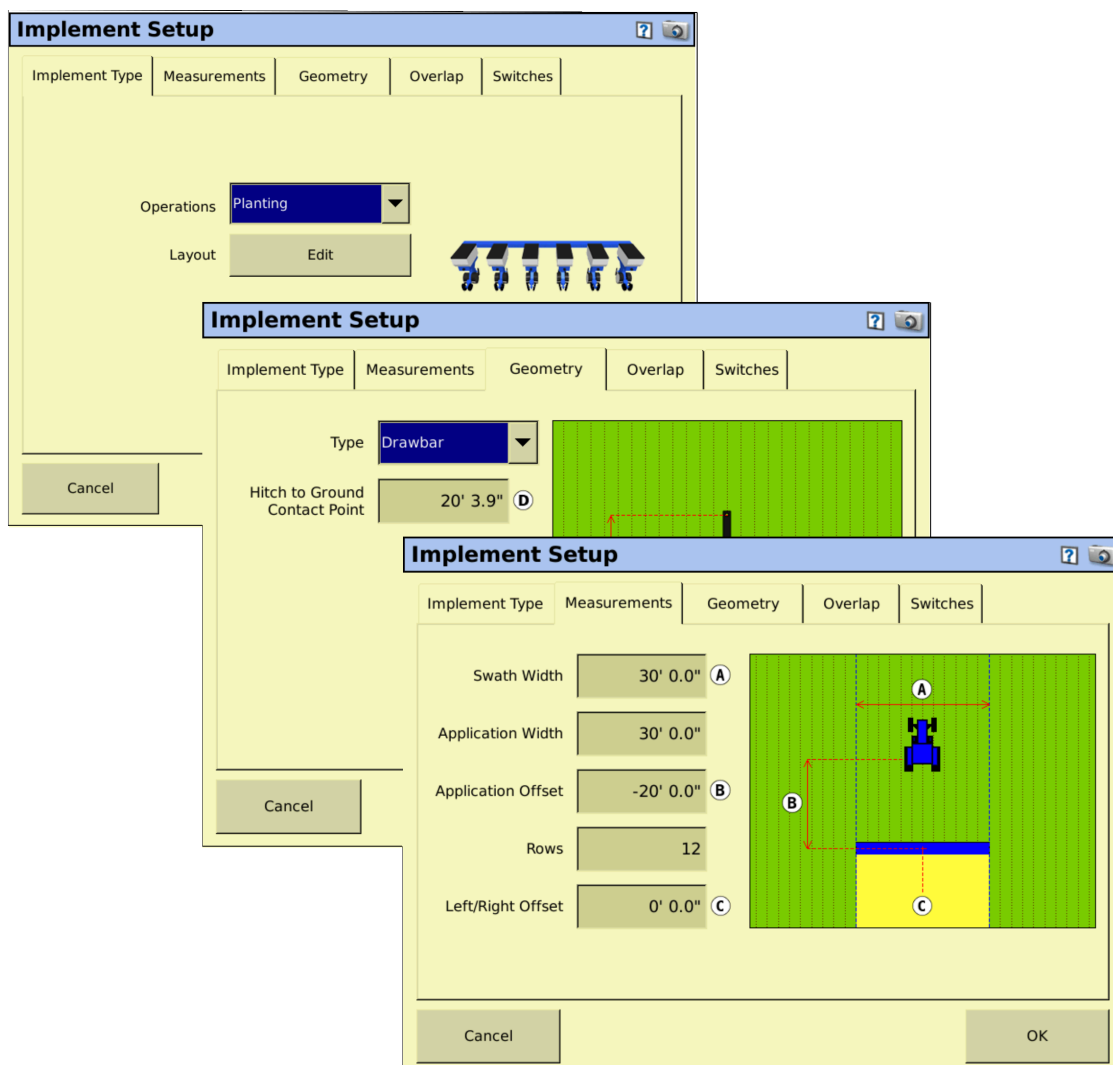



Quick Start Setup Instructions for Trimble's FM 750, FM1000, FMX Rate Controller

Field IQ Calibration

- On the Calibration page, select **Field-IQ** then press Calibrate button
- This will bring you to the Field-IQ Configuration screen
- Select **Drive Calibration**
- You can leave **Maximum Flow** set to 0 or enter the **Maximum Flow** rate of your pump in Gal/Min. Then press Next
- Follow the screen instructions to run **Auto Tuning** procedure.
- Press **Next** at the bottom of the screen to go to the **Drive Settings**.
- The settings on the **Drive Settings** screen are all duplicated on the **Advanced Parameters** screen. Press the **Advanced Parameters** button to go to the next screen.
- On the **Advance Tuning** page, set the settings as shown:
- **Upper PWM Limit:** 100

Lower PWM Limit:

GX5 (hydraulic).....28
GX2 (electric).....0
Synergist.....0

Integral Gain: (Adjust as needed)

GX5 (hydraulic).....10
GX2 (electric).....15
Synergist.....100

Minimum Response: (Adjust as needed)

GX5 (hydraulic).....20%
GX2.....0%
Synergist.....5%

Allowable Error:

GX5 (hydraulic).....1%-3%
GX2.....3%
Synergist.....5%

Smoothing Factor:

GX5 (hydraulic).....1%-3%
GX2.....3%
Synergist.....1%

NOTE: The TMX-2050 will use Proportional Gain instead of the Integral Gain. This is the opposite of the FmX. The Auto Tuning process should set this. If not, start with Proportional Gain at 20-30.

Field-IQ Drive Calibration

Drive Limits | Auto-Tuning | Drive Settings | Info

This step of the Auto-calibration allows you to set the maximum flow on your system so it doesn't operate outside its capability.

If the maximum limit of the system is unknown, please leave this setting set to zero to ensure accurate auto tune limits are calibrated.

Maximum Flow: 10.00 gal/min

Back Next

Field-IQ Drive Calibration

Drive Limits | Auto-Tuning | Drive Settings | Info

Turn the Master Switch on and vary between rates to ensure your system performs at the level you require.

Target Speed	5.00 mph	Integral Gain	15.00
Target Rate	10.00 gal/a R1	Minimum Response	0.0 %
Applied Rate	0.00 gal/a	Minimum Position	10.0 %
Master Switch	Off	Allowable Error	1.0 %
		Boost (Feed Forward)	Off

Advanced Parameters

Back Next

Field-IQ Drive Calibration

Advanced Tuning | Advanced PWM

Turn the Master Switch on and vary between rates to ensure your system performs at the level you require.

Target Speed	5.00 mph	Proportional Gain	0.0000
Target Rate	10.00 gal/a R1	Integral Gain	15.00
Applied Rate	0.00 gal/a	Differential Gain	0.0000
Master Switch	Off	Minimum Response	0.0 %
Upper PWM Limit	100.00 Hz	Allowable Error	3.0 %
Lower PWM Limit	0.00 Hz	Process Gain	0.180000
Comparator Limit	100.00 Hz	Smoothing Factor (Flow Filter Time Constant)	10.00 %
Ramp Limit	655.00 Hz	Pre Position Open	0.00
Boost (Feed Forward)	Off	Pre Position Stop	0.00

Cancel Accept



Quick Start Setup Instructions for Trimble's FM 750, FM1000, FMX Rate Controller

Advance PWM Tab

1. Press the Advance PWM tab On the Field-IQ Drive Calibration. Set the settings as shown:

Base PWM Frequency 100
Dither Frequency 0
Dither Amplitude 0
Dither Control: Absolute

Flow Calibration

2. Select **Field-IQ – Calibrate** on the Calibration screen. This brings up the screen where you can select **Flow Calibration**.

3. The **Flow Calibration** numbers may have already been set in the **Drive Setup**. You can verify or update the settings here.

4. After pressing "**Run Calibration**", a screen that will allow you to input your **Target Rate and Speed**. Enter your typical application rate and field speed. During calibration, the system will run at the correct flow for this rate speed.

5. You will need a **stop watch** to measure time. AgXcel recommends running the test for some duration in minutes for simple math. When your containers are in position under multiple fertilizer outlets, press the Start Flow, then turn on the Field IQ master switch and start your timer. The system will begin to run. When your containers are near full, push Stop Flow.

6. Now you will need to measure the amount of liquid caught. The number you enter must be in gallons per minute per row.

- Find total amount caught in ounces.
- Divide total ounces by number of rows caught.
- Divide ounces / row by 128 to convert to gallons / row

7. After entering the amount caught, the Flow Calibration number will automatically change. If it has changed more than 5%, review your catch test and repeat.

NOTE: AgXcel recommends running this procedure to verify set up is completed correctly. We recommend changing the flow calibration back to the standard ion flow meter calibration shown on the flow calibration on page 6.

The screenshot shows the 'Field-IQ Drive Calibration' screen with the 'Advanced PWM' tab selected. The settings are as follows:

Parameter	Value
Target Speed	5.00 mph
Target Rate	10.00 gal/a R1
Applied Rate	0.00 gal/a
Master Switch	Off
Base PWM Frequency	100 Hz
Dither Frequency	0 Hz
Dither Amplitude	0 %
Dither Control	Absolute

At the bottom, there is an 'Accept' button. To the left, a sidebar shows 'Rate and Section Control Module 5104505873' with options for 'Drive Calibration' and 'Flow Calibration'.

This block contains two buttons: 'Run Calibration' and 'OK'.

This block shows two input fields: 'Target Rate' set to '0.25 gal/a' and 'Speed' set to '10.00 mph'.

The screenshot shows the 'Rate and Section Control Flow Calibration Result' screen. It displays 'Measured Flow/Nozzle' as '1.50 oz/min'. At the bottom, there are three buttons: 'Cancel', 'Arm Pump', and 'OK'.





Quick Start Setup Instructions for Trimble's FM 750, FM1000, FMX Rate Controller

Initial Operation Instructions

AgXcel highly recommends you perform these exact steps with water to verify system is correctly installed and ready for field use.

- From the **Configuration Screen**, select **Field-IQ**, then **Diagnostics**. (If the Diagnostics tab is grayed out, you probably need to close a Field)
- Make sure that your pump is ready to be tested. Raise the implement and then tap **Next**
- Press the + next to **Speed** to simulate a **Speed** signal.
- Turn the **Field-IQ** master switch (#5) **On**.
- Push each section valve button and verify each valve is working.
- Turn **Switch #2** to **Manual** and open the section valves. Use **Switch #1** to increase flow. Does "**Current Flow**" display a flow rate? Is it stable after the system is primed? Do the increase & decrease buttons increase & decrease flow?
- Move **Switch #2** to **rate 1** and set speed to your typical field speed.
- The system should begin to pump liquid now in automatic control mode. **Is the flow in GPM stable? Is it applying the correct rate? (applied rate = target rate?)**
- Change rate using screen buttons or switch #1 to increase/decrease rate or switch #2 to go to rate 2. **Does applied rate change to equal target?**
- Close 1 section valve, does flow decrease? Does applied rate still equal target rate?**
- Change speed and target rate to minimum and maximum values. **Does the system perform at these values? Does the system pressure seem reasonable (remember fertilizer will increase pressure over water)?** Use "Sensor" tab at the top of the page to read pressure sensor value (If equipped).

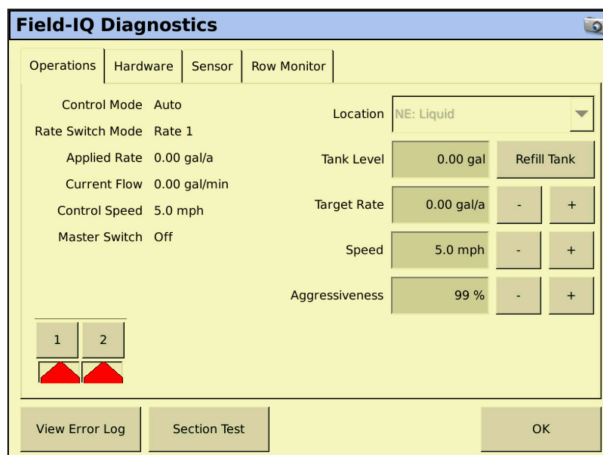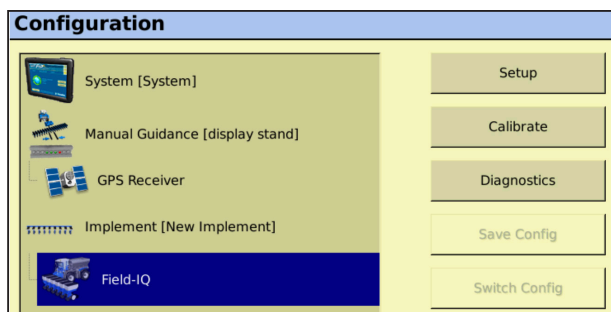

Running the System with water will create much lower pressure than fertilizer.





AgXcel Liquid System Frequency Asked Questions (FAQ)

I am trying to achieve 5 GPA but my system will not go lower than 9 GPA.

- Make sure your PWM Low Limit is set to a number that is lower than your required lowest rate. This can be found in your Valve Control PWM settings on your console. If the PWM Low Limit is set too high you will not be able to achieve the lowest rate possible if set other than 10. Many times setting the Low Limit to 0 will work just fine especially when running lower rates.
- With an AgXcel System always make sure your Minimum Flow rate is set to 0.0 GPM or your system will not drop below this rate. For example if the Minimum flow rate is set to 3 GPM your system will not drop below this setting so if your required GPA requires 2.1 GPM then your system will not achieve this rate given that you have set the Minimum Flow rate to 3 GPM.
- When using an AgXcel GX5 Hydraulic system, make sure the AgXcel silver hyd valve is NOT in manual override. Check to ensure that the RED knob on top of the valve is pressed down by turning the knob clockwise while pressing the RED knob down. This will lock the PWM valve down so that the electronic solenoid can control the hyd flow.

I am trying to achieve 12 GPA but my system will only go up to 8 GPA on my GX5 Hydraulic system or I am trying to achieve 8GPA and can only achieve 5 GPA on my GX2 electric system

AgXcel GX2 Electric System

- What is your system pressure? If system pressure is too high (50PSI or above) this will prevent you from achieving your highest rate possible. High system pressure with an electric system can put the electric pump head into bypass mode and will not allow for full flow.
- **Check the following areas to lower your pressure**
 1. Select a larger orifice or Micro Tube with a larger hole, this will allow for easier flow of liquid through the system and can increase over all flow and GPA
 2. Check your system filters and make sure they are clean. This should be a practice each morning before using the system
- AgXcel GX2 Electric Systems can achieve up to about 5.9 GPM with dual electric pumps. Check your total GPM requirements and ensure that you are within range
- When using a Dual Pump System – unplug 1 pump and ensure that the other pump is working. Perform this test with both pumps and if one pump sounds weak replace it immediately
- Ensure that your PWM High Limit is set to 100. Many times an Auto Tune will set this to a lower number so make sure this is set to 100
- If you controller has this option, make sure the PWM Duty Cycle is within range
- Check all your boom widths and make sure that all are set correctly

AgXcel GX5 Hyd System

- What is your system pressure? If system pressure is too high (90PSI or above) this will prevent you from achieving your highest rate possible. High system pressure with a hydraulic system set 100 PSI bypass spike valve to open and you could begin to lose volume
- **Check the following areas to lower your pressure**
 1. Select a larger orifice or Micro Tube with a larger hole, this will allow for easier flow of liquid through the system and can increase over all flow and GPA
 2. Check your system filters and make sure they are clean. This should be a practice each morning before using the system
- Check your total GPM requirements and ensure that you are within range of the GX5 hyd pumps recommended GPM
- Ensure that your PWM High Limit is set to 100. Many times an Auto Tune will set this to a lower number so make sure this is set to 100
- If you controller has this option, make sure the PWM Duty Cycle is within range
- Check all your boom widths and make sure that all are set correctly



AgXcel Liquid System Frequency Asked Questions (FAQ)

AgXcel Liquid System Frequency Asked Questions (FAQ) cont....

My rate is fluctuating and is almost locking in but is jumping around

- Make sure that your Rate Smoothing is checked and set to 10. You can typically find this setting under your System Controller settings. Rate Smoothing allows the system to lock into the rate if the rate is within 10% of the required rate. Many times liquid temperature can affect the performance of the system.
- Make sure your pressure is enough to fully OPEN every check valve on the implement. A good rule of thumb is to ensure that pressure is higher than 15 PSI when using 4lb, 5lb and especially 10lb check valves

How do I know where my pressure should be?

- AgXcel systems are not pressure based especially when they are controlled with a Liquid Rate Control Module. HOWEVER, pressure can affect the performance of the system if the pressure is too low or too high. Many users feel that the higher the pressure then the less chance they have to plug an orifice. Although this statement holds value it can also have a major effect on system performance
- **Low pressure – RECOMMENDED 15PSI is the lowest**
 1. Can affect the performance of the pump and may cause it to surge which affect the accuracy of your flow
 2. Can affect the performance of your system check valves, not enough pressure and all your check valves may not OPEN and this may affect the accuracy of your system
- **High Pressure – RECOMMENDED – GX2 Electric = 25PSI GX5 Hyd = 70PSI**
 1. Too high of pressure can also affect the performance of your system as this can cause too much restriction in the manifold tubes and too much resistance will slow the rate down
- **RULE OF THUMB FOR PRESSURE**
 - AgXcel GX2 systems = 15PSI – 25 PSI
 - AgXcel GX5 Hyd systems
 - Low Range = 15PSI – 40 PSI
 - Medium Range = 20PSI – 50PSI
 - High Range = 40PSI – 80PSI
 - All these ranges are OK for the AgXcel GX5 system
 - For High Speed Planters check out the AgXcel GX30i VRT Solution

How do I raise and lower my pressure when required

- If your pressure is too HIGH then increase the size of your orifice and or Micro Tube to a larger hole size
- If your pressure is too LOW then change the size of your orifice or Micro Tube to a smaller hole

TIP - Many times the system may have difficulty priming, or if a flow meter has not detected flow and you want the system to continue running so as to prime. Go to Diagnostics > Tests > Calibrate PWM Limits

1. Time for Auto Mode Testing -
2. Once again, enter a Test Speed
3. Press the AUTO button
4. Ensure that the height switch is down or unchecked
5. Turn the Master ON
6. You can now monitor system flow vitals and ensure that all outlets of liquid are flowing
7. Once again, check sections if sections are being used
8. System testing is complete - Turn OFF the Master Switch

AgXcel System Performance Settings - To ensure the best performance of your AgXcel system especially at Start Up, setting the PWM Start Up % can be fine tuned. PWM Start Up % sends voltage to the pumps at the % that has been set. This can assist in the priming cycle to get the pumps running quicker. Once the pumps jump up to the % set, then it will begin its cycle to lock into the required target rate setting.




AgXcel Trimble Pinout Diagrams

PINOUT DIAGRAMS

Wire Size: 18 AWG
unless otherwise specified


Trimble Field IQ Adapter Harness P/N 53519

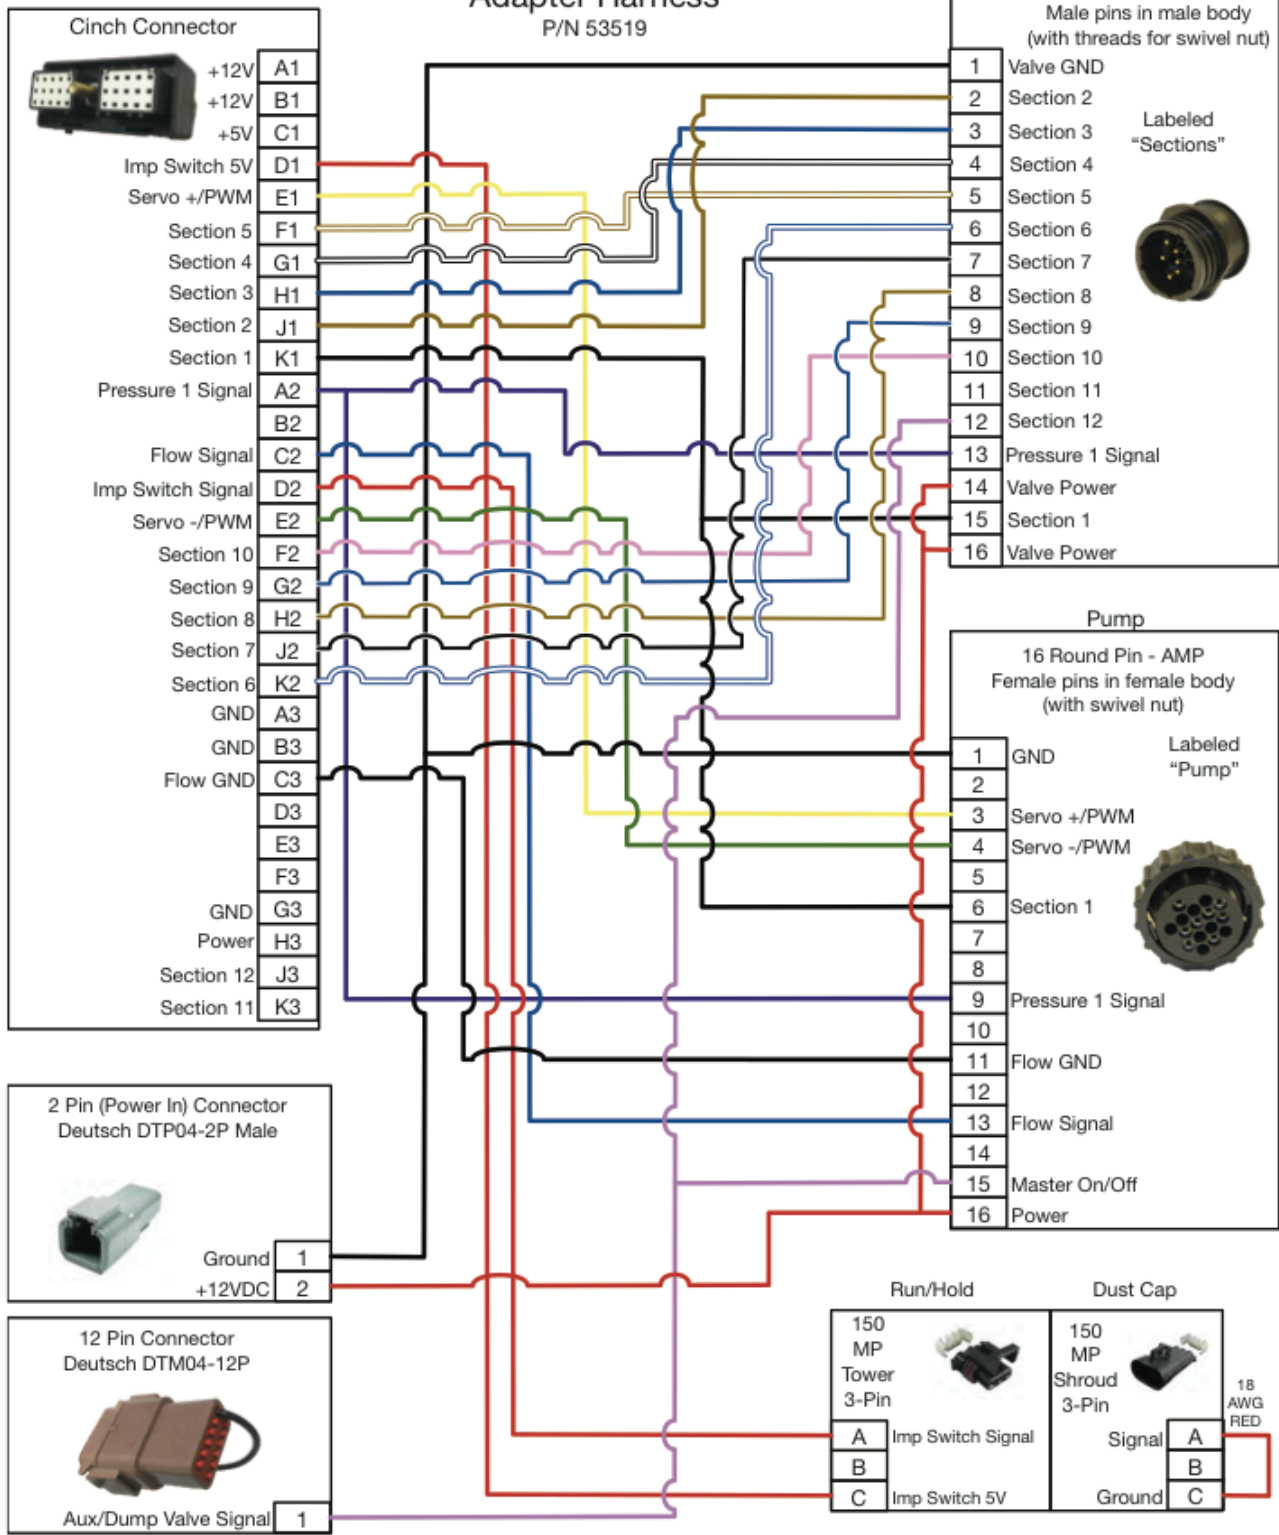




AgXcel Trimble Pinout Diagrams

PINOUT DIAGRAMS

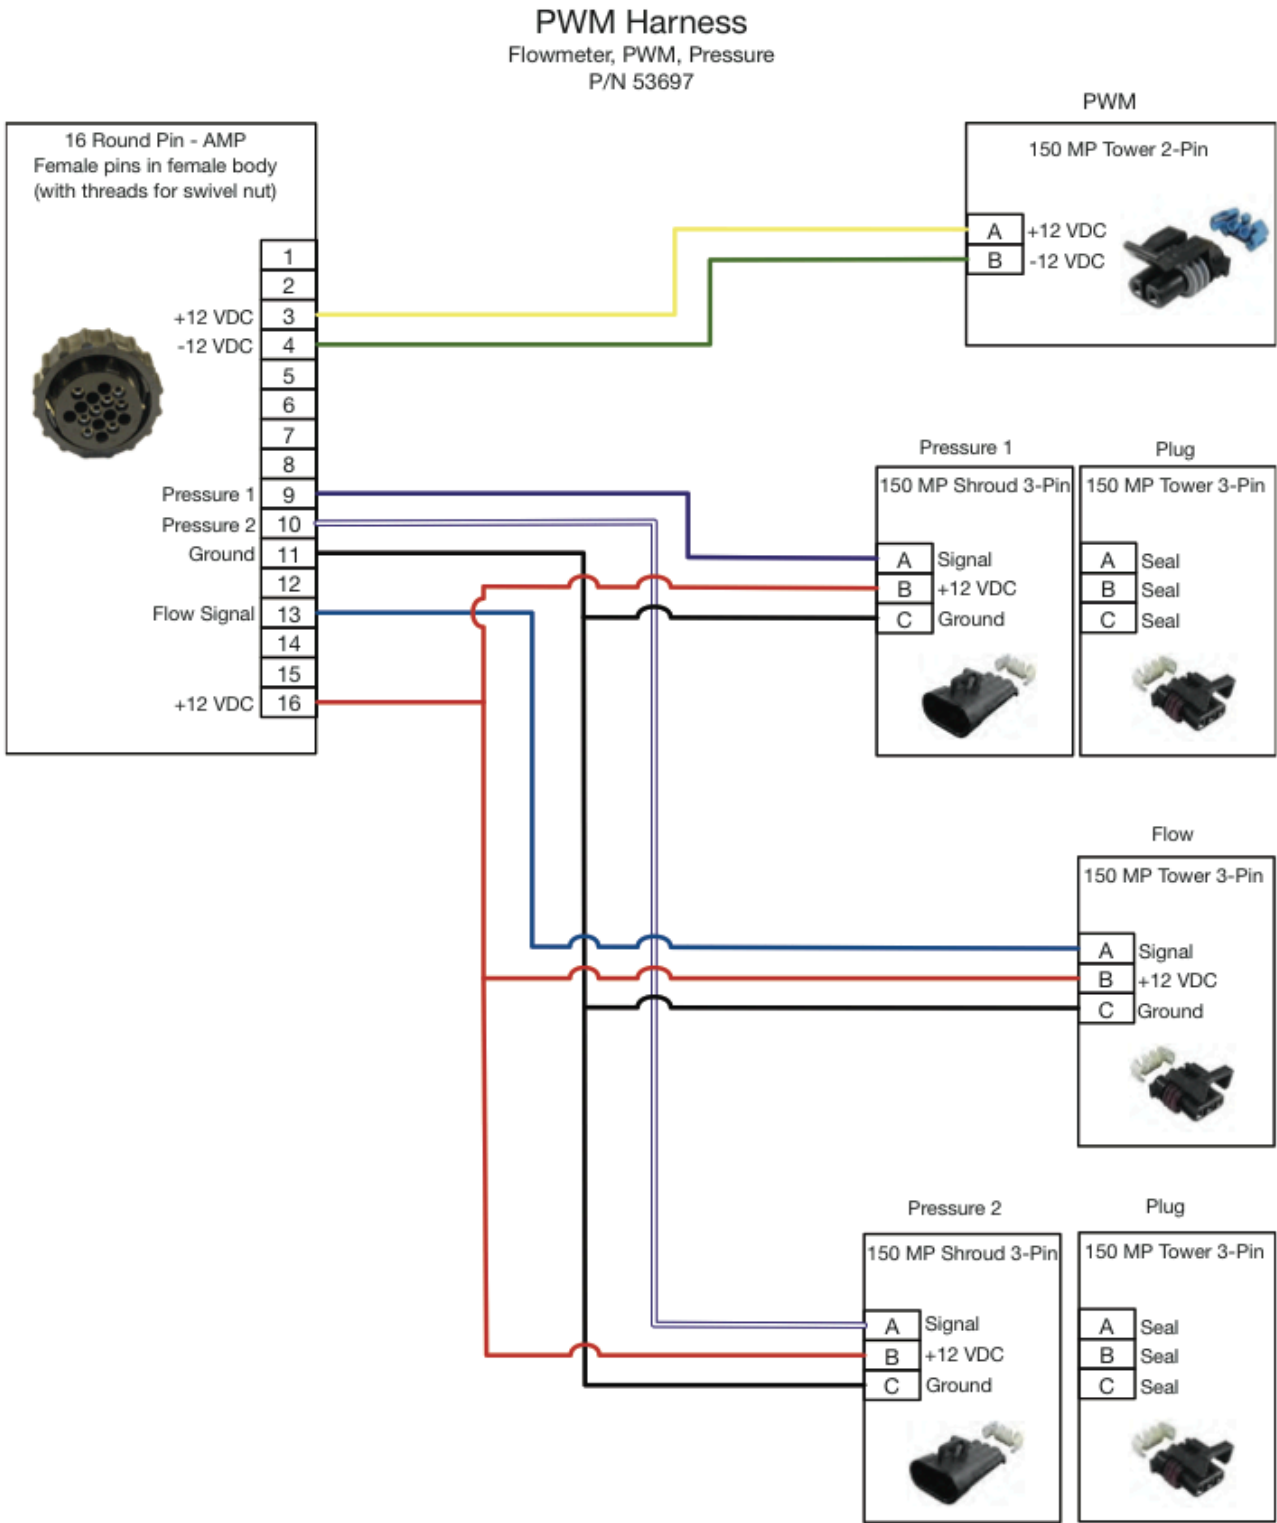

6 Section Boom Harness

P/N 53594

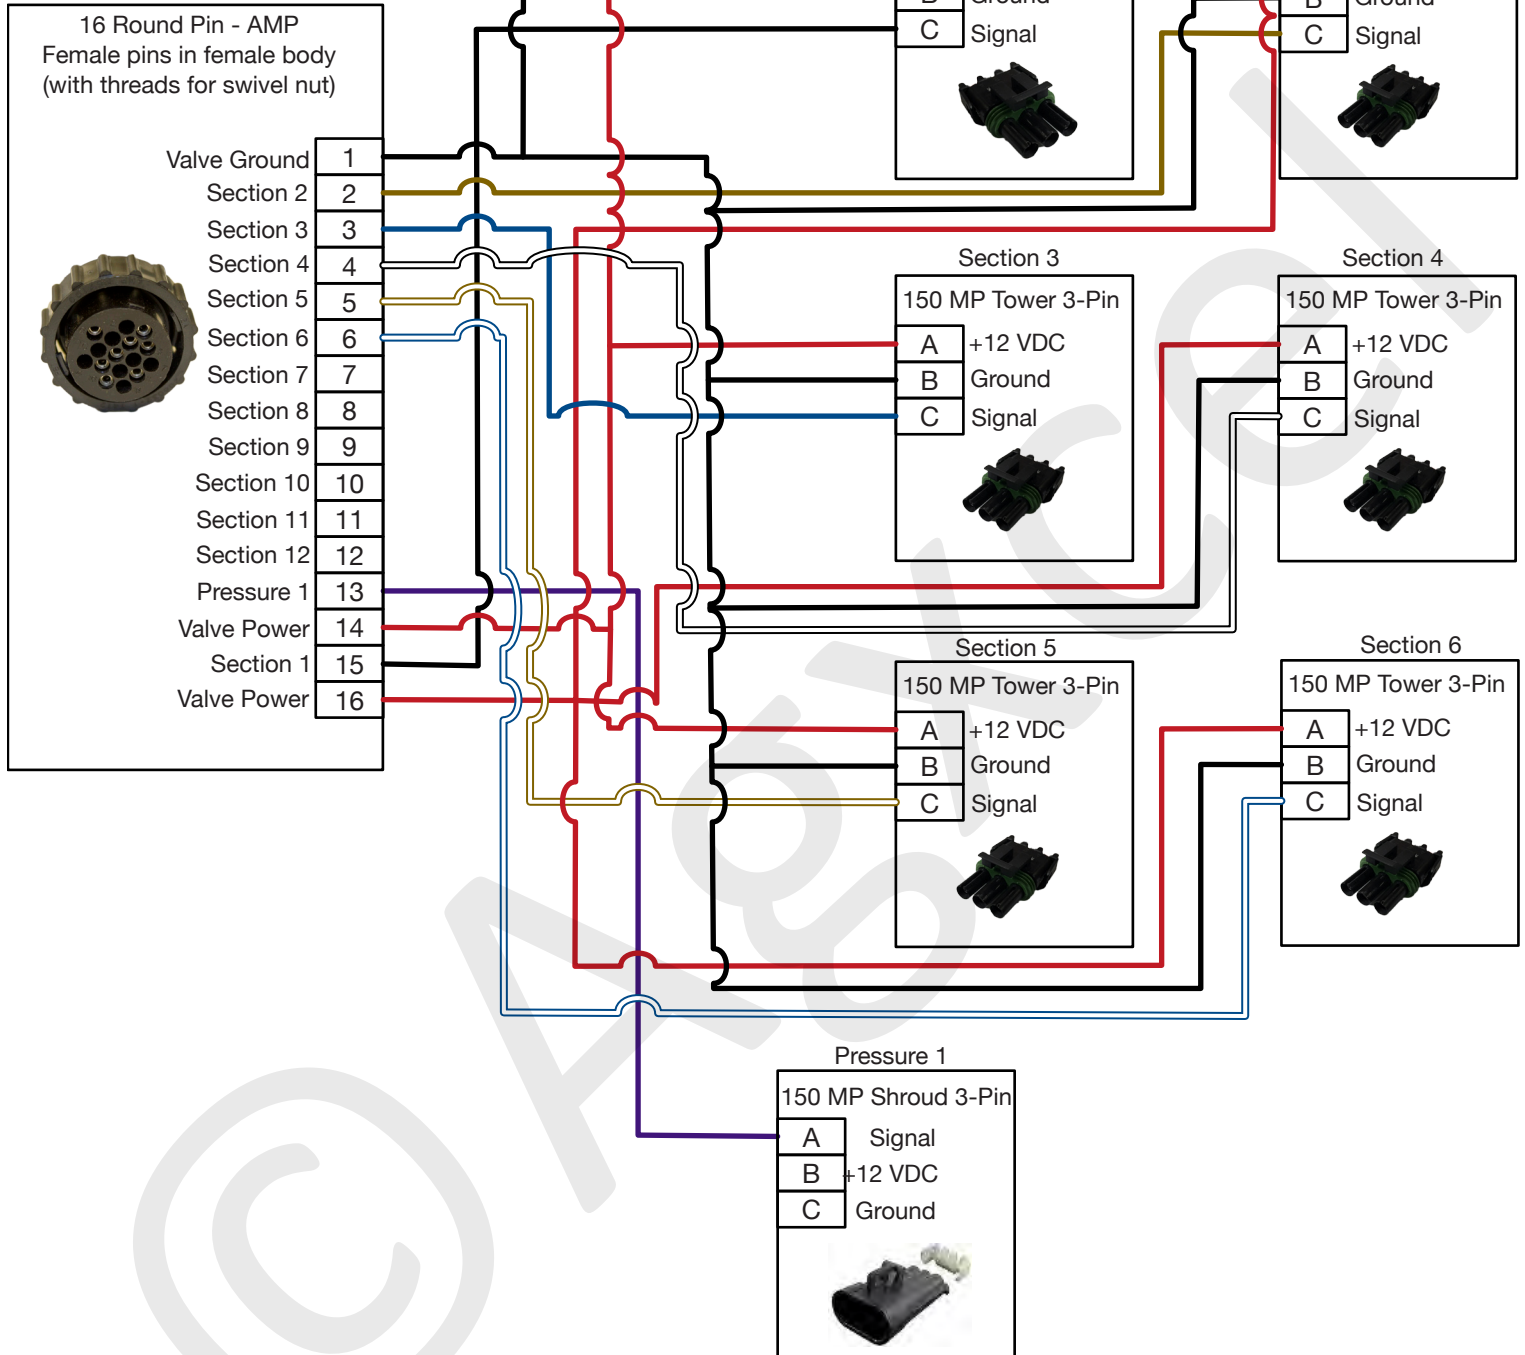

12 Section Boom Harness

P/N 53800

