

# JD DB MOUNTING BRACKET

**PN# 17693**

(READ INSTRUCTIONS COMPLETELY BEFORE BEGINNING INSTALLATION)



**116 E 6TH ST  
KEARNEY NE 68847**

**877.218.1981**



## Mounting Location

The AgXcel John Deere DB Mounting Bracket is designed to be installed on the support frame of the CCS tanks of DB planters. The bracket can be mounted on either side. The image below illustrates the area behind the right CCS tank and where the bracket will be mounted.

Bracket will be mounted on the "T" of the support frame.




[www.agxcel.com](http://www.agxcel.com)

[info@agxcel.com](mailto:info@agxcel.com)

## Mounting the back plate

Starting with the back plate of the bracket, use the two 1/2" x 6" x 5" U-Bolts to mount the back plate to the support bar as shown below.

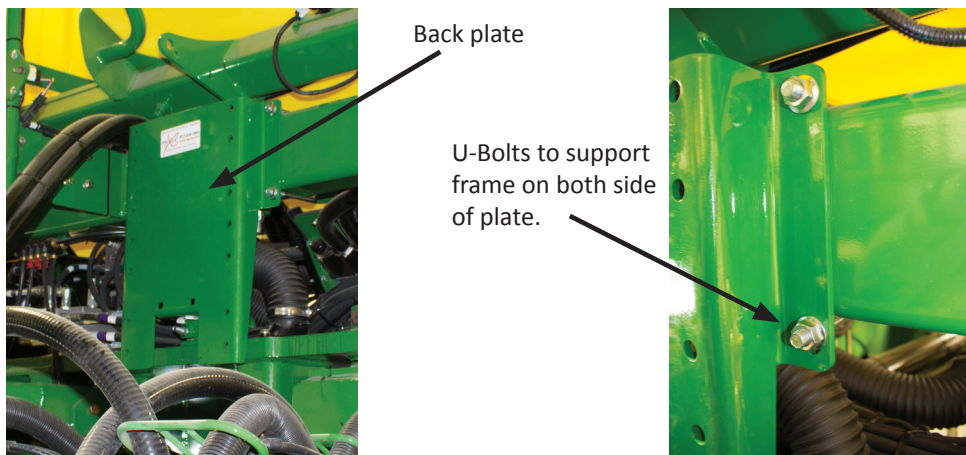

Use the 1/2" x 3" x 4 1/2" U-Bolt and mount the lower end of the plate to bottom of the "T" support beam as shown below.




Side View



Front View

## Mounting the cradle

Next mount the cradle to the back plate using four 1/2" x 1 1/4" bolts and four 1/2" flange nuts.

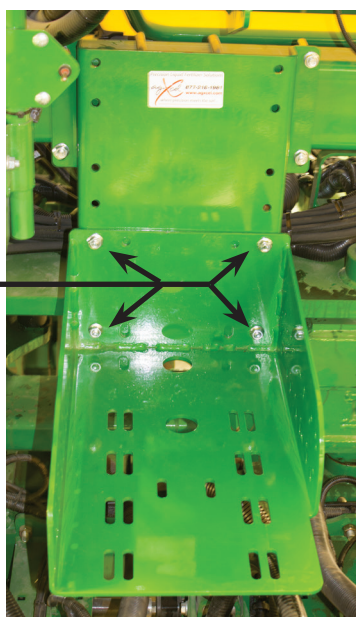

Fully assembled bracket. Note the additional holes on the bracket provide you with some variations in mounting the system.



**116 E 6TH ST  
KEARNEY NE 68847**

**877.218.1981**



[www.agxcel.com](http://www.agxcel.com)

[info@agxcel.com](mailto:info@agxcel.com)



## System Mounting

In the image below you can see an example of mounting the system to the DB Bracket using four 1/2" x 1 1/4" bolts and four 1/2" flange nuts. You can face the system in the direction that suits your needs.



**agxcel**  
**116 E 6TH ST**  
**KEARNEY NE 68847**  
**877.218.1981**



This image shows how the section control valves were mounted to the side of the bracket using the provided holes. The valves can be mounted on either side.



[www.agxcel.com](http://www.agxcel.com)

[info@agxcel.com](mailto:info@agxcel.com)